

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number  
**WO 2004/082726 A1**

(51) International Patent Classification<sup>7</sup>: **A61L 9/12**

(21) International Application Number:  
PCT/CH2004/000102

(22) International Filing Date: 26 February 2004 (26.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0306449.0 21 March 2003 (21.03.2003) GB

(71) Applicant (for all designated States except US): **GIVAUDAN SA** [CH/CH]; Chemin de la Parfumerie 5, 1214 Vernier (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCGEE, Thomas** [GB/US]; 34 Village Gate Way, Nyack, NY 10960 (US). **SGARAMELLA, Richard, P.** [US/US]; 1036 Garden Street, Hoboken, New Jersey, NJ 07030 (US). **BROWN, Colin** [GB/GB]; 5 Clandon Avenue, Egham, Surrey TW20 8LP (GB). **NAISH, Guy Edward** [GB/GB]; 28 Mullein

Road, Bicester, Oxfordshire OX26 3WE (GB). **GOHIL, Kishen** [GB/GB]; 21 Consfield Av., New Malden, Surrey KT3 6HB (GB).


(74) Agent: **MCSTEA, John, Anthony**; Givaudan Schweiz AG, Global Patents, Überlandstrasse 138, 8600 Dübendorf (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: VAPOUR DIFFUSING DEVICE

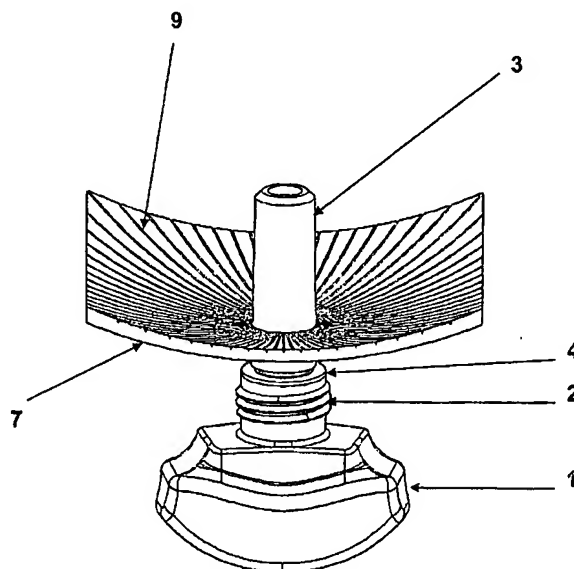

(57) Abstract: A device adapted to provide volatile liquid material to an atmosphere comprising a reservoir (1) containing volatile liquid material, a rod-like transfer member (3, 4) extending therefrom and adapted to transfer liquid from the reservoir, and at least one diffusion surface (7) adapted to receive the liquid from the transfer member and facilitate its evaporation into the atmosphere, the diffusion surface extending essentially laterally from the transfer member and comprising at least one non-integral, non-porous sheet bearing a surface capillarity (9), which sheet has an extent and a capillarity sufficient to allow an appropriate evaporation. The device is cheap and easy to construct, versatile and diffuses odour without major changes of the odour over time.

WO 2004/082726 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## VAPOUR DIFFUSING DEVICE

This invention relates to a device for diffusing volatile material into an atmosphere.

Devices for diffusing volatile materials into an atmosphere, for example, fragrances, air fresheners, anti-mould and anti-fungal materials, and insect repellents, are well known to the art. A typical device comprises a container adapted to store liquid volatile material and a diffusion member that provides the material to the atmosphere via an evaporation surface. This diffusion member receives the liquid for evaporation via a liquid conveying member, typically a wick of fibrous material. While having the advantages of cheapness and simplicity, the traditional wick has the drawback with some materials, such as fragrances, that the material diffused therefrom changes over time because of the earlier diffusion (and earlier exhaustion) of more volatile components, as a result of a fractionation of the components, similar to what occurs in a chromatographic column.

A recent alternative construction seeking to overcome this problem has been the use of at least one capillary, extending from the liquid to the atmosphere. This capillary can take the form of a rod provided with external grooves of capillary dimensions. While this overcomes the fractionation problem, it is more prone to leakage, for example, if the device is knocked over.

It has now been found that it is possible to provide a device that combines the advantages of the two types hereinabove mentioned, while substantially avoiding their disadvantages. The invention therefore provides a device adapted to provide volatile liquid material to an atmosphere, comprising a reservoir containing volatile liquid material, a rod-like transfer member extending therefrom and adapted to transfer liquid from the reservoir, and at least one diffusion surface adapted to receive the liquid from the transfer member and facilitate its evaporation into the atmosphere, the diffusion surface extending essentially laterally from the transfer member and comprising at least one non-integral, non-porous sheet bearing a surface capillarity, which sheet has an extent and a capillarity sufficient to allow an appropriate evaporation.

The invention additionally provides a method of providing an atmosphere with a volatile liquid material, comprising the feeding of liquid volatile material to at least one diffusion surface from a reservoir by means of a rod-like liquid transfer member, the diffusion surface  
5 comprising at least one non-integral, non-porous sheet having a surface capillarity and an extent sufficient to allow an appropriate evaporation, and being mounted on the transfer member such that it extends essentially laterally therefrom.

The reservoir can be any suitable reservoir, such as a bottle or jar of any suitable size or  
10 material, such as plastics, ceramics, glass and metal.

The essentially rod-like liquid transfer member serves to transfer the liquid from the reservoir to the diffusion surface. It may be any suitable such member. By "rod-like" is meant a member that is elongate (length appreciably greater than the largest dimension of its  
15 transverse cross-section). The shape of this cross-section is irrelevant for the purposes of this invention. For example, the cross-section may be circular, triangular or square, circular being particularly preferred, for simplicity of manufacture and because many reservoirs, such as bottles or jars, have circular orifices. However, it may also be oval or rectangular, and it can be essentially planar (formed from sheet material).

20

The transfer member may be any suitable constituency that allows it to convey liquid from the reservoir. For example, it may be a wick of porous material, as is well known to the art. Such wicks are made of materials such as cellulose, ceramic, plastics and graphite. It may also be an external capillary transfer member of the type described in, for example, United  
25 States Patent No. 4,913,350. It is a surprising feature of this invention that the conventional wick performs as well as an external capillary transfer member, thus making possible considerable cost savings.

The diffusion surface useful in the present invention is least one non-integral, non-porous  
30 sheet having a surface capillarity. By "sheet" is meant that the surface is a continuous, non-perforated one. It may be planar or it may be curved – one of the advantages of the invention

is the variety of shapes that can be used – but diffusion is a surface effect, as there is no absorption into the surface, because of the surface being non-porous. By “non-porous” is meant that the material of the sheet is completely lacking in porosity and is therefore incapable of absorbing liquid that flows thereon. By “non-integral” is meant that the sheet is  
5 not made in a single piece with the transfer member but is made separately and attached thereto. This again allows considerably versatility in the selection of shapes and configurations. The sheet may be made of any suitable non-porous substance, for example plastics, ceramics, glass or metals.

10 By “surface capillarity” is meant that the sheet comprises an open capillary structure along which liquid can travel and which allows evaporation. This can be done by any convenient means. In a preferred embodiment, the capillaries can be produced on the sheet itself by moulding or machining. The open capillaries may have any suitable cross-section, for example, “U”-shaped, “V”-shaped or rectangular, and they may be in any configuration or  
15 pattern, practical or ornamental or both. For example, they may extend radially from a central point, they may be in one or more sets of parallel lines, which may intersect each other at any suitable angle. All lines may be straight or curved to any desired extent.

Alternatively, the sheet may have no such capillaries but may act as a support for a capillary  
20 material, for example, a porous or fibrous material affixed thereto by any convenient means. Any suitable capillary material may be used, but it is preferred not to use an absorbent material, as this tends to absorb and hold liquid material. An especially favoured material is a fibrous material that itself incorporates surface capillarity.

25 It is possible to have surface capillarity of any kind on both sides of the sheet, but it is generally preferred for reasons of ease of manufacture to have it on only one side, preferably on that side that will be uppermost in use.

The mounting of the diffusion surface on the transfer member may be at any point on the  
30 transfer member by any means, although it is preferred that the surface be mounted somewhere between the ends of the transfer member, most preferably nearer the reservoir

than to the transfer member end remote from the reservoir. This allows for better functioning. Preferred embodiments are further described hereinafter.

It is an important feature of this invention that the at least one diffusion surface extend  
5 essentially laterally from the transfer member. Provided that there is good liquid transfer between transfer member and diffusion surface (further described hereinafter), the exact configuration of the surface with respect to and nature of the lateral extension from the transfer member are not important, although there are arrangements and orientations that work better than others. The diffusion surface may be of any suitable shape such as flat,  
10 curved (simple or complex curves of any kind) and dished. Many possible configurations of diffusion surface are possible, and the skilled person will readily be able to provide many variants that lie within the scope of this invention. Examples include:

- (a) a flat surface of any shape, surrounding and extending laterally from the transfer  
15 member, the plane of this surface being essentially transverse to the longitudinal axis of the transfer member;
- (b) as (a), but with the surface curved to form an arc or "dished" to form a shallow bowl, preferably in an upwardly direction with respect to the reservoir;
- (c) at least one planar diffusion surface extending from the transfer member in the form  
20 of a flat vane-like member, the plane of the vane-like member being at any convenient angle or orientation to the transfer member;
- (d) as (c), but with the vanes curved in any desired fashion;
- (e) a transfer member with a flat top, across which extends a diffusion surface, like the horizontal stroke of a letter T, the diffusion surface being flat or curved.

25

The preferred configurations are (a) and (b).

Naturally, the diffusion surface must contact the transfer member in such a manner that liquid transfer from the transfer member to the diffusion surface is facilitated. This means  
30 that the ends of the surface capillarity must directly and closely contact the surface of the transfer member. In the case of a wick, this is easier to achieve than is the case with an

external capillary transfer member, as the entire wick is acting as a conduit for the liquid. In the case of an external capillary transfer member, there may need to be alignment of the various capillary systems. Alternatively, there may be placed between an external capillary transfer member and a diffusion surface a layer of absorptive material, which can facilitate transfer of liquid from transfer member to diffusion surface. This works effectively, but it can add complexity and cost.

When the non-porous sheet itself comprises capillarity, optimal liquid transfer may be achieved by ensuring that the ends of this surface capillarity contacting the transfer member should be substantially perpendicular thereto. A reasonable variation out of the perpendicular may be tolerated, but there will come a point when transfer will be impaired. Discovery of a suitable angle is well within the skill of the art.

When the non-porous sheet is merely the support for a surface capillary material mounted thereon, the angle is not quite so important, but nevertheless it is well understood that narrow angles resulting in bowl- or cone-like shapes will impair evaporation, and therefore relatively open-faced (i.e., angles close to right-angles subtended at the transfer member) are also preferred in this case.

There are several preferred structures that assist not only the liquid transfer but which also assist in easy assembly. One particularly preferred embodiment involves the use of a transfer member of substantially circular cross-section, in which at least a part of the length thereof is slightly frusto-conical, that is, it tapers as it moves away from the reservoir. This ensures that a diffusion surface with an aperture of diameter intermediate between the largest and smallest diameters of the wick cannot slide too far downwards, and good contact is ensured. In such a case, it is preferred that the sides of the aperture in the diffusion surface are angled to match the angle of the frusto-conical section. This ensures particularly good fit and liquid transfer.

In a further embodiment, the transfer member has provided on its surface an annular groove and the diffusion surface is provided with a circular aperture of similar diameter, configured

so that the diffusion surface can be snap-fitted into the groove, in the manner of a circlip. A particularly preferred embodiment is a combination of the groove and the frusto-conical shape. Alternatively, the transfer member may be provided with a slot, into which fits an identically-dimensioned tab provided on a diffusion surface. These are only some of the possible ways of attaching the diffusion member; other ways will be clear to the skilled person.

The devices of the present invention have numerous advantages over devices already known to the art. They are easily and cheaply made from common materials. They are readily assembled from their components. They are readily refillable. In the case of fragrances, they reduce considerably the tendency for the fragrance to change over time. Most surprisingly, this last-named advantage is achieved even when the transfer member is a wick, previously known for odour changes with time.

A further considerable advantage is the versatility conferred in regulating the amount of evaporation. By altering the variables of the area and shape of the diffusion surface and the nature and concentration of the surface capillarity, a wide range of different evaporation rates can be achieved. Thus, a device can be supplied with a variety of easily-removable diffusion surfaces to suit particular circumstances, such as room size and concentration desired.

The invention is further described with reference to the drawings. These depict preferred embodiments and are not meant to limit the invention in any way.

Figure 1 is a perspective view of a preferred embodiment.

Figure 2 depicts a longitudinal cross-section of a transfer member at the point where it contacts a diffusion surface.

Figure 3 depicts an arrangement wherein surface capillarity is conferred by a porous material affixed to a non-porous surface.



Figure 4 depicts a variety of possible surface capillarity arrangements.

Figures 2-4 are schematic and are not to scale, certain dimensions being exaggerated for the purposes of clarity.

In Figure 1, a reservoir 1 (a bottle or jar) has a neck 2 into which is fitted a rod-like porous wick 3, this being a tight fit into the neck by means of a tightly-fitting elastomeric plug 4 that surrounds the wick. The wick is circular in cross-section and that part of the wick protruding from the reservoir is slightly conical as shown at Figure 2, having a narrower end 5 remote from the reservoir and a broader end 6 closer to the reservoir. This permits the easy mounting on the wick of a diffusion surface 7, which has an aperture 8 of diameter greater than that of end 5 but greater than that of end 6. The aperture 8 is shaped so that it closely matches the frusto-conical surface of the wick, ensuring good contact and liquid transfer. The diffusion surface is a curved sheet of non-porous plastic that bears on its surface a series of open capillaries 9.

In Figure 3, a frusto-conical wick 3 bears a non-porous diffusion surface 10. To this is affixed a capillarity-providing material 11. This material covers that surface of the diffusion surface facing downwards in normal operation and extends into the aperture 8 of the diffusion surface, such that it contacts the wick and is able to absorb and transfer liquid for evaporation. The weight of the diffusion surface acting downwards helps secure the surface and establish a good liquid transfer contact.

In Figure 4, there can be seen a variety of surface capillarities. These are presented by way of example only and they are not limiting of the many practical and ornamental possibilities.


## Claims:

1. A device adapted to provide volatile liquid material to an atmosphere, comprising a reservoir containing volatile liquid material, a rod-like transfer member extending therefrom and adapted to transfer liquid from the reservoir, and at least one diffusion surface adapted to receive the liquid from the transfer member and facilitate its evaporation into the atmosphere, the diffusion surface extending essentially laterally from the transfer member and comprising at least one non-integral, non-porous sheet bearing a surface capillarity, which sheet has an extent and a capillarity sufficient to allow an appropriate evaporation.
2. A device according to claim 1, in which the rod-like transfer member is a porous wick.
3. A device according to claim 1 or claim 2, in which the diffusion member is a solid sheet and the capillarity is provided therein by the formation on at least one surface thereof of at least one open capillary channel.
4. A device according to claim 1 or claim 2, in which the diffusion member is a solid sheet and the capillarity is provided therein by the affixing thereto of a capillary material.
5. A device according to any one of claims 1-4, in which the diffusion member is mounted on the transfer member by means of an aperture in the diffusion member, the aperture having a shape that allows the placing of the diffusion member on the transfer member such that it is in liquid transfer contact therewith.
6. A device according to claim 5, in which the transfer member is tapered and the diffusion member has an aperture of dimensions intermediate between the largest and smallest cross-section of the transfer member.

7. A device according to claim 6, in which the transfer member is frusto-conical and the aperture is circular.
8. A device according to any one of claims 1-7, in which the transfer member bears at a  
5 suitable point along its length an annular groove and the aperture is dimensioned so as to fit into this groove in liquid transfer contact.
- 9 A method of providing an atmosphere with a volatile liquid material, comprising the feeding of liquid volatile material to at least one diffusion surface from a reservoir by  
10 means of a rod-like liquid transfer member, the diffusion surface comprising at least one non-integral, non-porous sheet having a surface capillarity and an extent sufficient to allow an appropriate evaporation, and being mounted on the transfer member such that it extends essentially laterally therefrom.

1/3

Fig.1

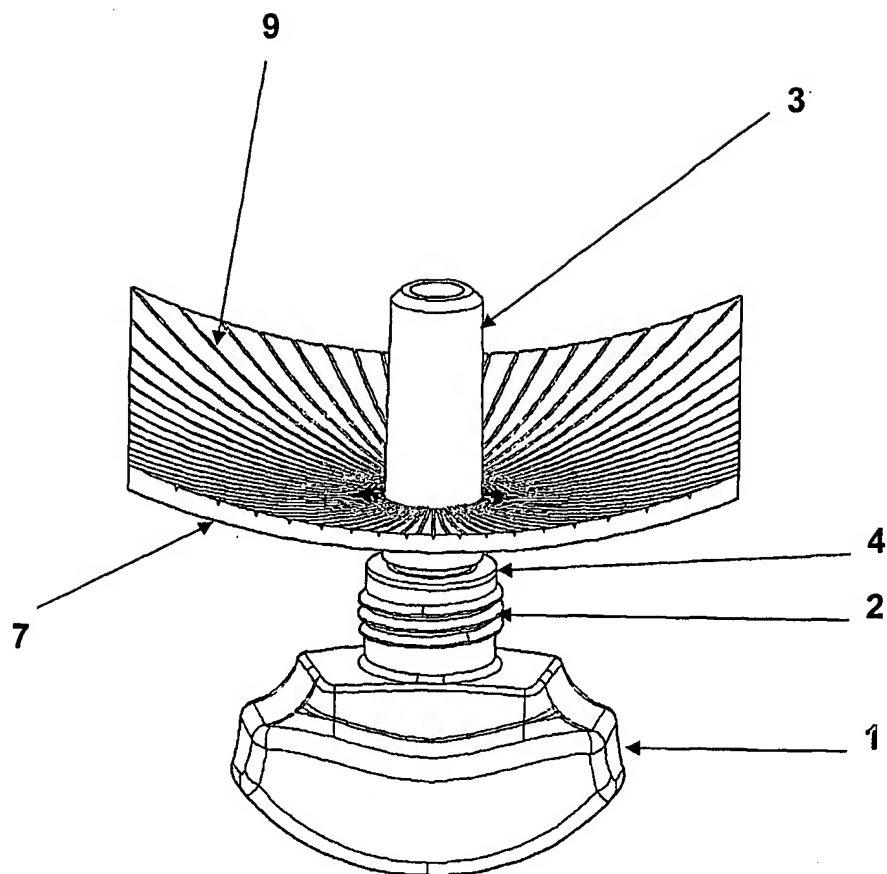

2/3

Fig.2







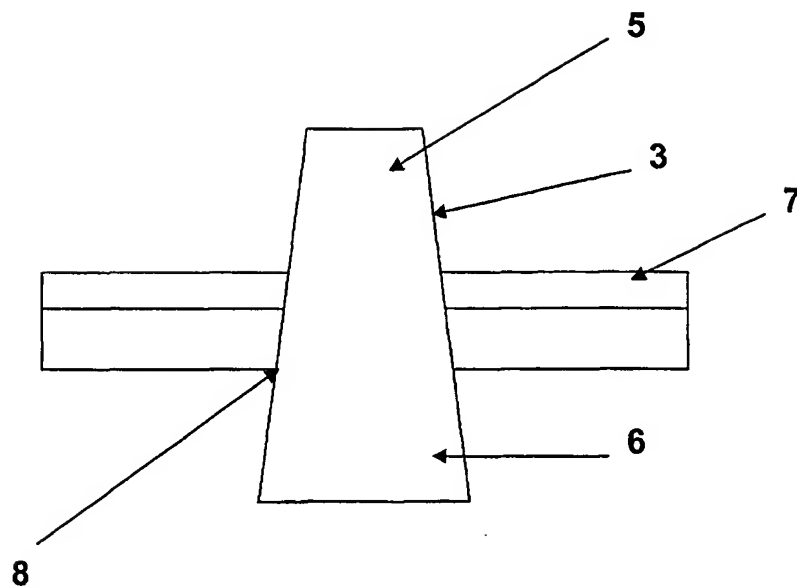


Fig.3

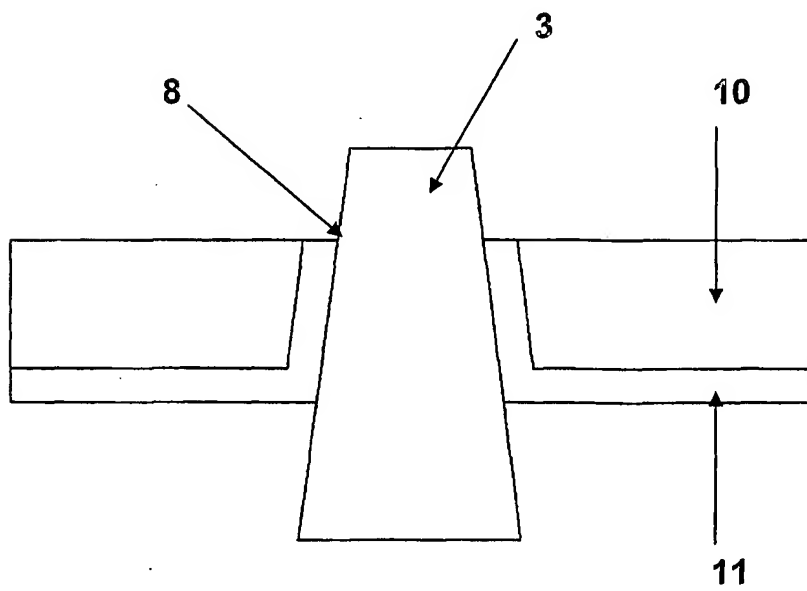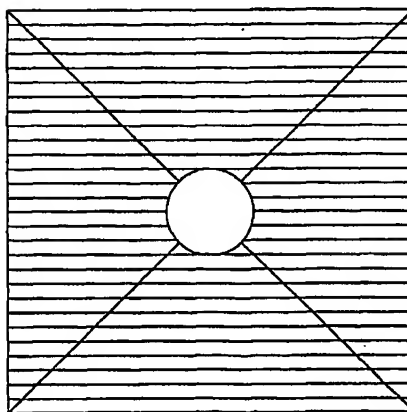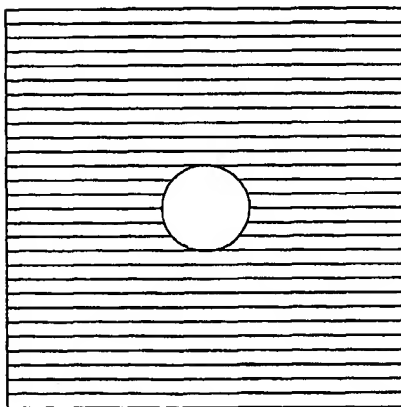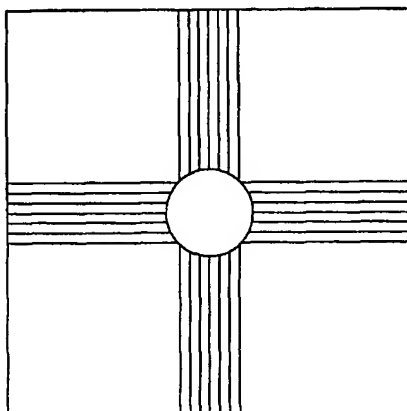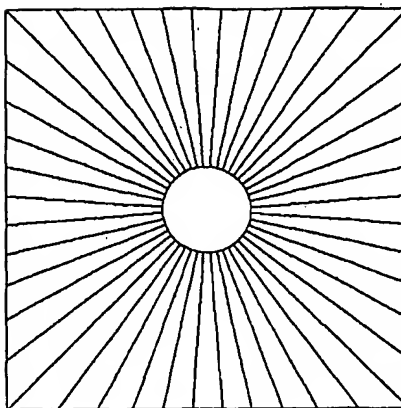

3/3

Fig.4

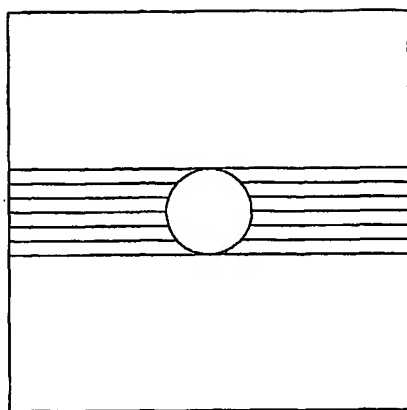

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/CH2004/000102

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61L9/12 A61L9/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/34302 A (JONES STUART MICHAEL RUAN ; RECKTT BENCKISER UK LTD (GB)) 2 May 2002 (2002-05-02) page 3, lines 20-33; claims 1,2 page 6, lines 23-29 page 7, line 16 - page 8, line 20; claims 1,2; figures	1-3,9
X	WO 98/16262 A (JOHNSON & SON INC S C) 23 April 1998 (1998-04-23) page 3, line 4 - page 4, line 7; figures	1,2,4,5, 9
X	US 4 928 881 A (BARLICS JOHN J ET AL) 29 May 1990 (1990-05-29) column 2, paragraph 43 - column 4, paragraph 9; figures & US 4 913 350 A (PURZYCKI KENNETH L) 3 April 1990 (1990-04-03)	1,2,4,5, 9
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

26 May 2004

Date of mailing of the international search report

03/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Persichini, C

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/CH2004/000102

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 304 688 A (MORI YASUYUKI) 8 December 1981 (1981-12-08) column 4, lines 4-12; figure 1 -----	1,2,4,5, 9
A	US 4 913 350 A (PURZYCKI KENNETH L) 3 April 1990 (1990-04-03) column 2, lines 34-59 column 3, line 67 - column 4, line 9 -----	1-9



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International Application No  
PCT/CH2004/000102

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0234302	A	02-05-2002	AU 9577301 A BR 0114841 A CA 2426220 A1 EP 1328299 A1 WO 0234302 A1 GB 2370225 A , B US 2004060997 A1	06-05-2002 16-09-2003 02-05-2002 23-07-2003 02-05-2002 26-06-2002 01-04-2004
WO 9816262	A	23-04-1998	AU 4898597 A WO 9816262 A1	11-05-1998 23-04-1998
US 4928881	A	29-05-1990	NONE	
US 4913350	A	03-04-1990	AT 101799 T AU 619530 B2 AU 3195589 A CA 1316454 C DE 68913294 D1 DE 68913294 T2 WO 8908462 A1 EP 0386158 A1 JP 2756328 B2 JP 2503522 T	15-03-1994 30-01-1992 05-10-1989 20-04-1993 31-03-1994 07-07-1994 21-09-1989 12-09-1990 25-05-1998 25-10-1990
US 4304688	A	08-12-1981	JP 1223115 C JP 56095054 A JP 57050504 B	15-08-1984 01-08-1981 27-10-1982
US 4913350	A	03-04-1990	AT 101799 T AU 619530 B2 AU 3195589 A CA 1316454 C DE 68913294 D1 DE 68913294 T2 WO 8908462 A1 EP 0386158 A1 JP 2756328 B2 JP 2503522 T	15-03-1994 30-01-1992 05-10-1989 20-04-1993 31-03-1994 07-07-1994 21-09-1989 12-09-1990 25-05-1998 25-10-1990

# PCT

## INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY (Chapter I of the Patent Cooperation Treaty)

(PCT Rule 44bis)

Applicant's or agent's file reference 30085 PCT	FOR FURTHER ACTION	See item 4 below
International application No. PCT/CH2004/000102	International filing date (day/month/year) 26 February 2004 (26.02.2004)	Priority date (day/month/year) 21 March 2003 (21.03.2003) ]
International Patent Classification (IPC) or national classification and IPC A61L 9/12		
Applicant GIVAUDAN SA		

1. This international preliminary report on patentability (Chapter I) is issued by the International Bureau on behalf of the International Searching Authority under Rule 44 bis.1(a).

2. This REPORT consists of a total of 6 sheets, including this cover sheet.

In the attached sheets, any reference to the written opinion of the International Searching Authority should be read as a reference to the international preliminary report on patentability (Chapter I) instead.

3. This report contains indications relating to the following items:

- |  |   |
|--|---|
| <input checked="" type="checkbox"/> Box No. I  | Basis of the report   |
| <input checked="" type="checkbox"/> Box No. II | Priority  |
| <input type="checkbox"/> Box No. III           | Non-establishment of opinion with regard to novelty, inventive step and industrial applicability  |
| <input type="checkbox"/> Box No. IV            | Lack of unity of invention  |
| <input checked="" type="checkbox"/> Box No. V  | Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement |
| <input type="checkbox"/> Box No. VI            | Certain documents cited   |
| <input type="checkbox"/> Box No. VII           | Certain defects in the international application  |
| <input type="checkbox"/> Box No. VIII          | Certain observations on the international application   |

4. The International Bureau will communicate this report to designated Offices in accordance with Rules 44bis.3(c) and 93bis.1 but not, except where the applicant makes an express request under Article 23(2), before the expiration of 30 months from the priority date (Rule 44bis .2).

Date of issuance of this report  
23 September 2005 (23.09.2005)

Authorized officer

Yolaine Cussac

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No. +41 22 740 14 35

Telephone No. +41 22 338 70 80

From the  
INTERNATIONAL SEARCHING AUTHORITY

REC'D 2 JUN 2004
WIPO PCT

PCT

To:

see form PCT/ISA/220

WRITTEN OPINION OF THE  
INTERNATIONAL SEARCHING AUTHORITY  
(PCT Rule 43bis.1)

Date of mailing  
(day/month/year) see form PCT/ISA/210 (second sheet)

Applicant's or agent's file reference  
see form PCT/ISA/220

**FOR FURTHER ACTION**  
See paragraph 2 below

International application No.  
PCT/CH2004/000102

International filing date (day/month/year)  
26.02.2004

Priority date (day/month/year)  
21.03.2003

International Patent Classification (IPC) or both national classification and IPC  
A61L9/12, A61L9/04

Applicant  
GIVAUDAN SA

1. This opinion contains indications relating to the following items:

- ☒ Box No. I Basis of the opinion
- ☒ Box No. II Priority
- ☐ Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- ☐ Box No. IV Lack of unity of invention
- ☒ Box No. V Reasoned statement under Rule 43bis.1(a)(i) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- ☐ Box No. VI Certain documents cited
- ☐ Box No. VII Certain defects in the international application
- ☐ Box No. VIII Certain observations on the international application

2. **FURTHER ACTION**

If a demand for international preliminary examination is made, this opinion will usually be considered to be a written opinion of the International Preliminary Examining Authority ("IPEA"). However, this does not apply where the applicant chooses an Authority other than this one to be the IPEA and the chosen IPEA has notified the International Bureau under Rule 66.1bis(b) that written opinions of this International Searching Authority will not be so considered.

If this opinion is, as provided above, considered to be a written opinion of the IPEA, the applicant is invited to submit to the IPEA a written reply together, where appropriate, with amendments, before the expiration of three months from the date of mailing of Form PCT/ISA/220 or before the expiration of 22 months from the priority date, whichever expires later.

For further options, see Form PCT/ISA/220.

3. For further details, see notes to Form PCT/ISA/220.

Name and mailing address of the ISA:



European Patent Office  
D-80298 Munich  
Tel. +49 89 2399 - 0 Tx: 523656 epmu d  
Fax: +49 89 2399 - 4465

Authorized Officer

Persichini, C

Telephone No. +49 89 2399-8617



**WRITTEN OPINION OF THE  
INTERNATIONAL SEARCHING AUTHORITY**

International application No.  
PCT/CH2004/000102

---

**Box No. 1 Basis of the opinion**

---

1. With regard to the **language**, this opinion has been established on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.
  - ☐ This opinion has been established on the basis of a translation from the original language into the following language , which is the language of a translation furnished for the purposes of international search (under Rules 12.3 and 23.1(b)).
2. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application and necessary to the claimed invention, this opinion has been established on the basis of:
  - a. type of material:
    - ☐ a sequence listing
    - ☐ table(s) related to the sequence listing
  - b. format of material:
    - ☐ in written format
    - ☐ in computer readable form
  - c. time of filing/furnishing:
    - ☐ contained in the international application as filed.
    - ☐ filed together with the international application in computer readable form.
    - ☐ furnished subsequently to this Authority for the purposes of search.
3. ☐ In addition, in the case that more than one version or copy of a sequence listing and/or table relating thereto has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that in the application as filed or does not go beyond the application as filed, as appropriate, were furnished.
4. Additional comments:

**WRITTEN OPINION OF THE  
INTERNATIONAL SEARCHING AUTHORITY**

International application No.  
PCT/CH2004/000102

---

**Box No. II Priority**

---

1. ☒ The following document has not been furnished:

☒ copy of the earlier application whose priority has been claimed (Rule 43*bis*.1 and 66.7(a)).

☐ translation of the earlier application whose priority has been claimed (Rule 43*bis*.1 and 66.7(b)).

Consequently it has not been possible to consider the validity of the priority claim. This opinion has nevertheless been established on the assumption that the relevant date is the claimed priority date.

2. ☐ This opinion has been established as if no priority had been claimed due to the fact that the priority claim has been found invalid (Rules 43*bis*.1 and 64.1). Thus for the purposes of this opinion, the international filing date indicated above is considered to be the relevant date.

3. Additional observations, if necessary:

---

**Box No. V Reasoned statement under Rule 43*bis*.1(a)(i) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

---

1. Statement

Novelty (N)	Yes: Claims	6,7,8
	No: Claims	1,2,3,4,5,9
Inventive step (IS)	Yes: Claims	
	No: Claims	1-9
Industrial applicability (IA)	Yes: Claims	1-9
	No: Claims	

2. Citations and explanations

see separate sheet

**D1: WO-A-02 343 02**

**D2: US-A-4 913 350**

**D3: WO-A-98 162 62**

**Re Item V.**

1. The present set of claims does not meet the requirements of Art. 6 PCT:
  - 1.1 The unclear formulation "... non-integral, non-porous sheet bearing a surface capillarity, which sheet has ..." in claim 1 (and similarly in claim 9) is interpreted with the help of the description to read "... non-porous sheet which is non-integrally formed with the transfer member, bears a surface capillarity, and has ...".
  - 1.2 Claim 4 and the description, page 3, lines 19 to 23 seem to be in contradiction to claim 1, when the expression "surface capillarity" is interpreted according to the definition given in the description, page 3, lines 10 to 17.
  - 1.3 Same features should be designated by same expressions. It is supposed that the expressions "diffusion member" in claims 2 to 6 and "diffusion surface" in claim 1 designate the same feature.
  - 1.4 The formulation "aperture is dimensioned so as to fit into this groove" in claim 8 is unclear. It is interpreted with the help of the description to mean that "the radial inner part of the aperture of the diffusion member (diffusion surface) is dimensioned so as to snap-fit into the groove".
2. Document D1 discloses a device adapted to provide volatile liquid material 3 (reference signs according to D1) to the atmosphere, comprising a reservoir 4 for containing volatile liquid material, a rod-like transfer member 5 extending therefrom and adapted to transfer liquid from the reservoir, and at least one diffusion member 6 adapted to receive the liquid from the transfer member and facilitate its evaporation into the atmosphere, the diffusion member extending essentially laterally from the transfer member and comprising at least one non-porous sheet (called surface area in D1, page 8, lines 18 to 20) which is non-integral with the transfer member (implicitly disclosed in D1, eg claim 2, where the two members are said to be preferably integrally formed), bears a surface

capillarity (grooves 23), and has an extent and a capillarity sufficient to allow an appropriate evaporation.

Thus, since D1 discloses all the features of claim 1, the subject-matter of this claim does not meet the requirements of Art. 33(1),(2) PCT.

3. On account of the same reasons the subject-matter of claim 9 does not meet the requirements of Art. 33(1),(2) PCT, either.
4. Considering the disclosure of documents D1 to D3 and the general knowledge of the skilled person, it does not appear that the dependent claims contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of novelty and/or inventive step (Article 33(2) and (3) PCT).